


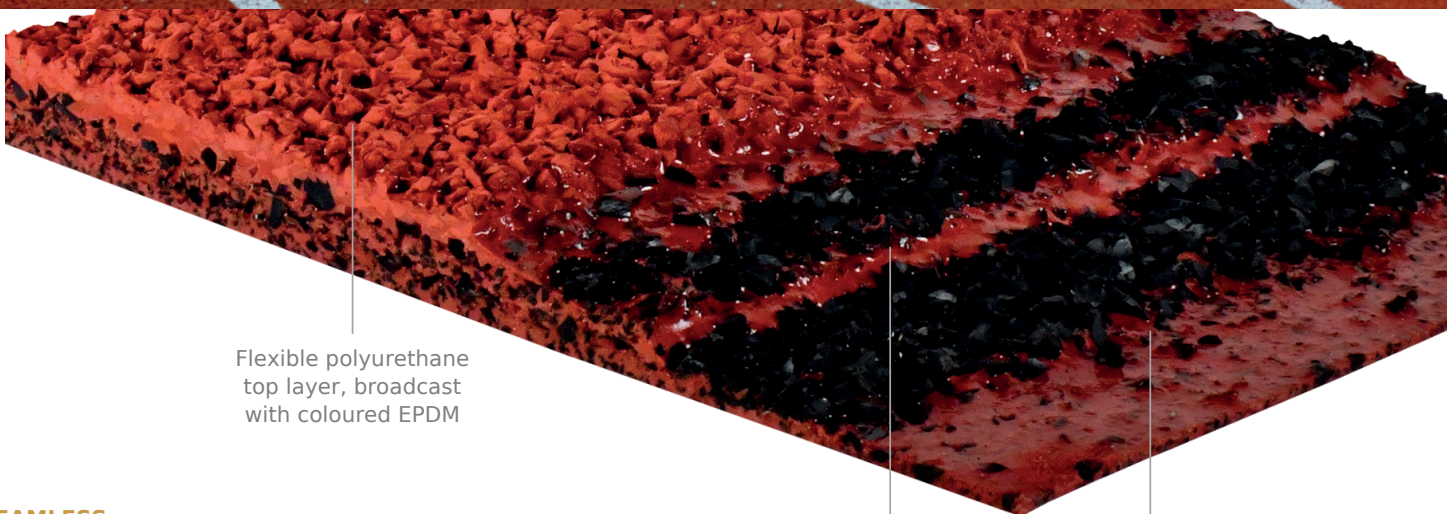

Flexible polyurethane
top layer, broadcast
with coloured EPDM

Flexible polyurethane
interlayer with SBR

Flexible polyurethane
base layer with SBR

- SEAMLESS
- SPIKE-RESISTANT
- WORLD ATHLETICS CERTIFIED

A seamless, full-polyurethane surface for athletics training and competition. Three flexible polyurethane casting layers form the certified 18.0 mm system, with SBR in the lower layers and coloured EPDM at the surface.

TECHNICAL PERFORMANCE

	SR OLYMPIC	WA REQUIREMENT
Absolute thickness	18.0 mm	—
Friction	56	> 47
Tensile strength	0.54 MPa	> 0.50 MPa
Elongation at break	42%	> 40%
Impact absorption at 23 °C	39%	35%–50%
Vertical deformation at 23 °C	2.1 mm	0.6–2.5 mm

Full PUR · Water-impermeable · World Athletics S-26-0720

Issued 1 May 2026 · Expires April 2030

